


# HQS-19.2W-60LED-RGBNW-24V

Professional Led Strip, 19.2 W/m

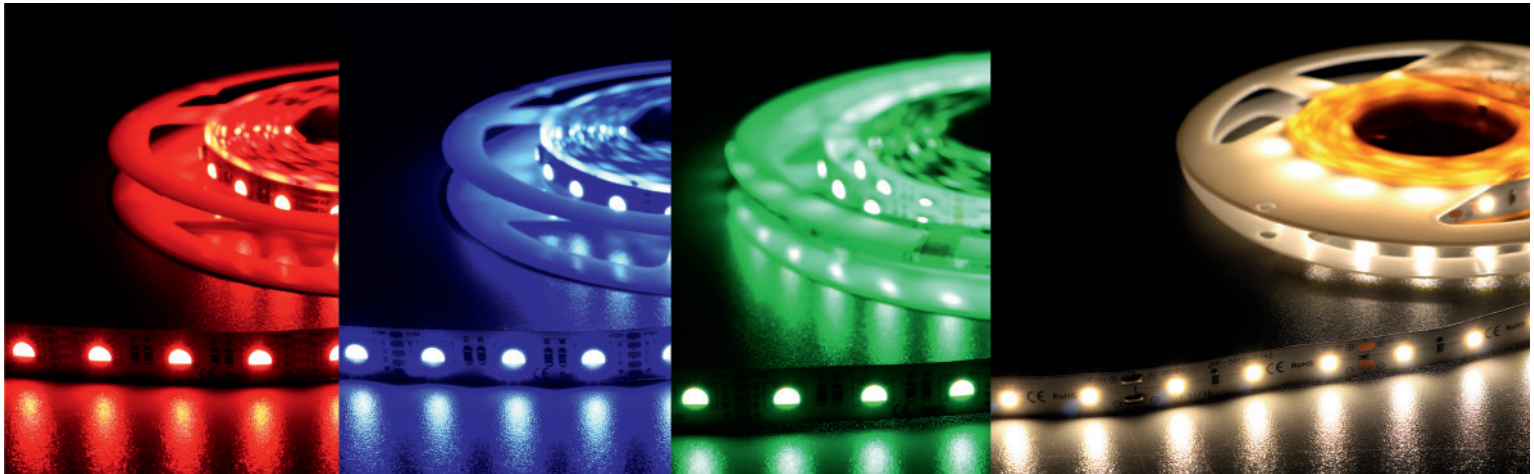

## TECHNICAL DETAILS

SUPPLY VOLTAGE	24 V ± 0.5 VDC
POWER	19.2 W/m, 3 W/0.5m for NW
CURRENT	0.8 A/m
POWER PER REEL (5M)	96 W
COLOR TEMPERATURE	R: 620 - 630 G: 510 - 520 B: 460 - 470 NW: 4000K
BEAM ANGLE	120°
LUMINOUS FLUX PER METER	R: 170 lm G: 300 lm B: 100 lm NW: 1134 lm
CRI	80
MAXIMUM LENGTH FOR ONE SIDED SUPPLY	5 m
IP PROTECTION DEGREE	IP33
WORKING TEMPERATURE	-25°C ~ 50°C
STORAGE TEMPERATURE	-25°C ~ 60°C
LED QTY (PER METER)	60 LEDs/m
WIDTH PCB	12 mm
CUT SECTION	100 mm
CONNECTION WIRE	2 x AWG20 (0.52 mm <sup>2</sup> ) stranded wire, length = 360 mm: V+: red: V:-black
DIMENSIONS (L * W * H)	5004 x 12 x 1.8 mm
PACKING	5 m /roll (bag); 40 pcs / ctn; ctn dimensions: 45 x 25 x 25 cm

**ENERGY**  
MW LIGHTING  
HQs-19.2W-60LED-RGBNW-24V  
A  
B  
C  
D  
E  
F  
G  
3 kWh/1000h  
2019/2015

